

SPECIFICATIONS

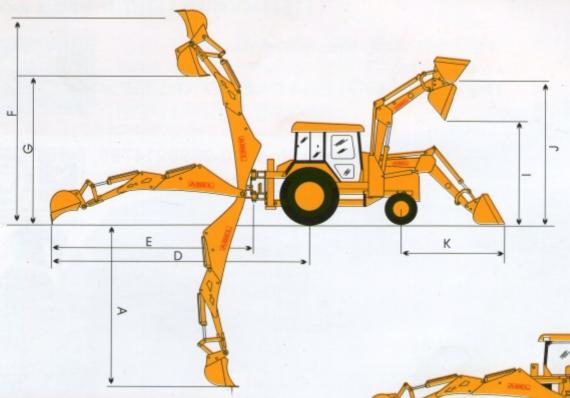

STATIC DIMENSIONS




OVER ALL LENGTH	7.8m
SLEW GROUND CLEARANCE	.66m
MINIMUM GROUND CLEARANCE	.36m
EXCAVATOR MINIMUM REACH (FROM REAR AXLE)	3.1m
LOADER MINIMUM REACH (FROM FRONT AXLE)	2.5m
MAXIMUM HEIGHT	3.2m
	SLEW GROUND CLEARANCE MINIMUM GROUND CLEARANCE EXCAVATOR MINIMUM REACH (FROM REAR AXLE) LOADER MINIMUM REACH (FROM FRONT AXLE)

BACKHOE PERFORMANCE

		Ditortion Little Orthology				
	Α	DIG DEPTH	3.8m			
	В	REACH OVER THE SIDE FROM STABILIZER	4.1 m			
	C	REACH FROM SWING PIVOT CENTRE LINE	5.0 m			
	D	REACH FROM REAR AXLE CENTRE LINE	6.41m			
	Е	REACH FROM PIVOT CENTRE LINE	5.0m			
	F	HEIGHT MAX FULLY RAISED	5.26m			
1	G	LOADING HEIGHT CLEARANCE	3.42m			
1	н	STABILIZER SPREAD	2 21m			





FEATURES

(A)	Low cost, o	can be installed	even on	second hand	tractors.
-----	-------------	------------------	---------	-------------	-----------

- (B) Nation wide network, approved by Tractors manufacturers.
- (C) Can be very effectively used in excavating soil, foundation for building, trenches for pipeline & Cable laying, to handle garbage, Widening of rural roads.
- (D) Easy spares availability at very low cost compared to other earthmoving machinery.
- (E) The ABEL Backhoe-Loaders attachment has a structure thats rugged, the styling very modern and unrivalled.
- (F) Its mainframe (chassis structure) is fully welded and is designed for durability using advanced computer analysis. This ensure correct distribution and dissipation of Backhoe-Loader and tractor gear box induced stresses.
- (G) ABEL Backhoe-Loader is a contractor's low cost dream machine.

LOADER PERFORMANCE

1	DUMP HEIGHT	2.59m
J	MAXIMUM OPERATING HEIGHT	3.85m
K	REACH AT GROUND	2.45m

^{*}The technical characteristics are indicative and in no way binding. The specification are subject to change without notice and may vary from tractor to tractor.
*We manufacture Backhoe - Loader, Dazer attachments only. Tractors are manufactured by respective manufactures under their tractors are manufactured by respective manufactures under their tractors.

A.B. EXCAVATORS & EARTHMOVERS (P) LTD.

(AN ISO 9001: 2000 CERTIFIED CO.)

Head Office: ABEL COMPLEX, Plot No.164, First Floor, Sector-25, Faridabad - 121 004, Haryana (INDIA) Factory: Industrial Plot No. 9, Krishna Colony, Sector-56, Sohna Road, Faridabad - 121004 (INDIA)
Ph.: 0129-4155033-36,3293608 Fax.: 0129-4061570

Email: mktg@abelindia.com Website: www.abelindia.com

Customer Care Mobile Nos.: 0-9999914795, 0-9810280709

Authorised Dealer



BACKHOE LOADERS ATTACH MENTS











ABEL Heavy Duty Backhoe Loader Design offers customers to go for 60 HP Tractors because ABEL assures low Fuel consumption measuring to almost half than other 75 HP Backhoe Loaders.







ABEL Heavy Duty Backhoe Loader attachments suitable for 60 HP & above Tractors like **NEW HOLLAND** etc.

MODEL:BASIC- Heavy Duty BACKHOE LOADER suitable for 60 HP & above Tractors with WIPRO Hydraulic Cylinders, Bonnet Guard.

MODEL: FULL LOADED - Heavy Duty BACKHOE LOADER suitable for 60 HP & aboveTractors, Full Loaded with **WIPRO** Hydraulic Cylinders, Deluxe Cabin, Cab Floor, Bonnet Guard, New changed Bonnet, Side Rear View Mirrors & extra Fog Lights

POSSIBLE ADDITIONAL OPTIONS

- •Loader Buckets (Standard, Grab 5 in 1, Multitask 7 in 1)
- Backhoe Buckets (Different Capacities)
- Forklift Attachments / Crane Attachments
- •Colours: Green / Yellow / Red / Blue





HIGH PRODUCTIVITY

